




- Assembly ease with up down movement facility.

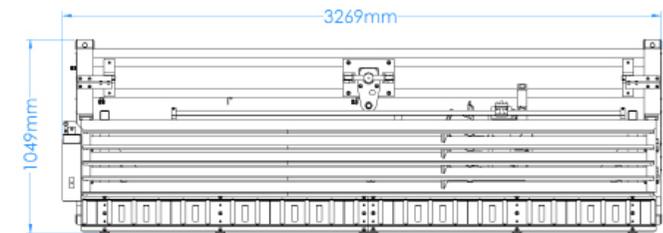

General Features

- Fast safe and practical glass installation on doors and windows.
- Fast and secure transfer by roller system.
- Ergonomic assembly height is obtained by lifting the frame up.
- The frame is fixed with pneumatic clamping pistons.

 H: 2800 mm	 430 kg	 6 Bar 7,91 l / Cycle	 A max: 2000 mm h max: 2450 mm
-----------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------	---------------------------------------------------------------------------------------------------------------------------