


• Operation with adjustable angled and positioned 3 drillers.



• The driller detail special to profile process is shown on machine panel.

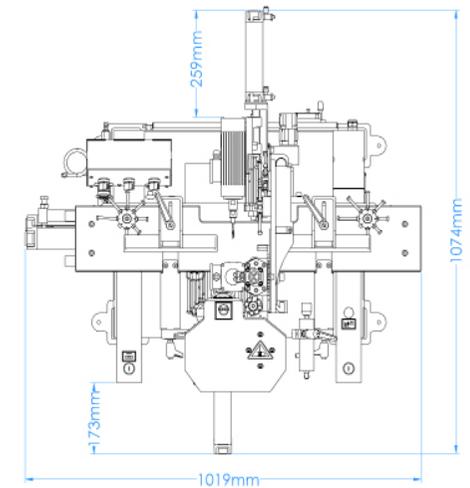


General Features

- Water slot opening on PVC profiles shown on Image 1.
- Practical operation thanks to versatile stoppers.
- Practical adjustment with rotating mechanical support plates.
- Hydropneumatic pistons to adjust progress speed.

H: 1560 mm	230 V L1-N-PE 50 / 60 Hz 1.1 kW	215 kg	6-8 Bar 24 l / Cycle	D1: 5.2 mm D2: 8 mm mov: 18000 mm 3 driller	a max: 140 mm h max: 180 mm

Profile shape to be processed.

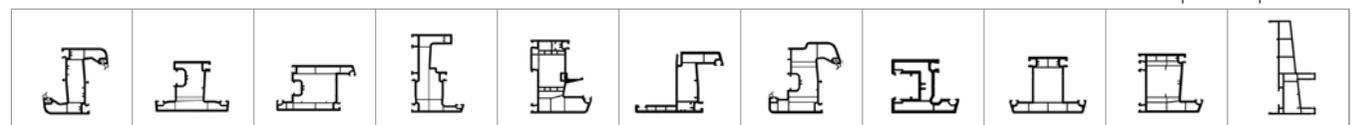

• Image 1